



Supervisor
Mark W. Assini

Director of Public Works
Kurt Rappazzo

Town of Gates

1605 Buffalo Road
Rochester, NY 14624
Phone (585) 247-6100
Fax (585) 426-8581




Town Council
☆☆☆☆
Lee A. Cordero
Andrew Loughlin
Christopher B. DiPonzio
Steve Tucciarello

DECK PLAN WORKSHEET FOR: _____ (ADDRESS)

See reverse side for general Deck & Pool Deck requirements

DIMENSIONS/DECKING

1. _____ Feet _____ Inches Deck Width
2. _____ Feet _____ Inches Deck Length
3. _____ Feet _____ Inches Total Square Feet
4. _____ / _____ x _____ Decking Type & Size (TREX, Azek, etc.)
5. _____ Decking (Perpendicular/Diagonal)
6. _____ Feet _____ Inches Deck Height

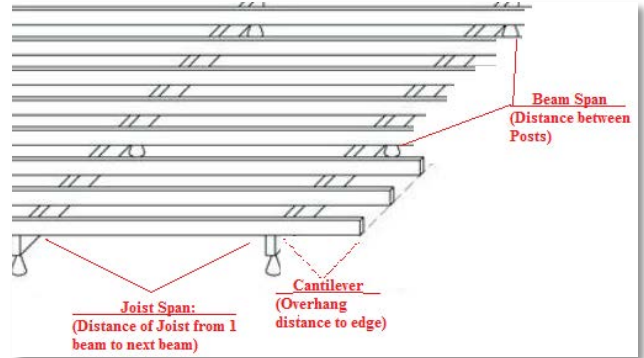

JOISTS/ BEAMS


7. 2 x _____ / & _____ O.C. Joist Size & Spacing (example 2x6 & 16" O.C)
8. _____ Feet _____ Inches Joist Post Span
9. _____ - 2 x _____ Beam/Girder Size (example 2-2x8's or 3-2x8's)
10. _____ Feet _____ Inches Girder/Beam Post Span

CANTILEVER (Actual Joist/Beam Span divided/by 4 = Allowable Joist/Beam Span)

11. _____ Feet _____ Inches Cantilever on side of Joists (Joist Span/distance hanging over from beam to edge)
12. _____ Feet _____ Inches Cantilever on side of Beams (Beam Span/distance hanging over from post to edge)


DECK POSTS/FOOTER (Max height for post sizes 8' maximum if 4x4/ 4x6 posts and 14' maximum if 6x6 posts)

13. _____ Are you **Notching** the Posts or Attaching Beams to a **Post Cap**?
14. _____ x _____ Post Size* (can't notch 4x4 Posts)
15. _____ Post Footing Diameter (Minimum 12"-18")
16. _____ Feet _____ Inches Post Depth (Minimum 42" below Grade, flare bottom holes)

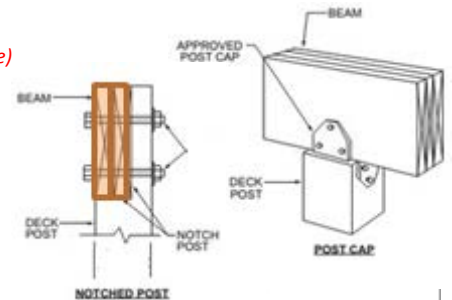


FREESTANDING/ATTACHED

17. _____ YES _____ NO Freestanding Deck Attached To House?
18. 2 x _____ Ledger Board Size
19. _____ Flashing (Galvanized, Copper, Vinyl/& 4" above ledger)
20. _____ Flashing membrane? (Peel/Stick Waterproof Membrane)

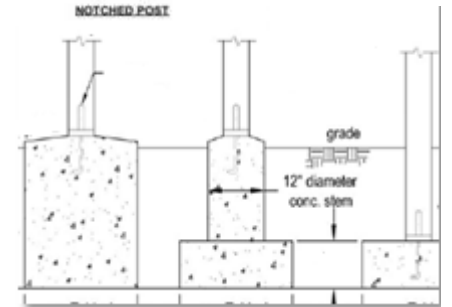

GUARD RAILING (Required if Deck Height is greater than 30")

21. _____ Feet _____ Inches Top Rail Height (36" minimum)
22. _____ x _____ Railing Post Size (example 4x4)
23. _____ x _____ / & _____ O.C. Spindle/Baluster Size & Spacing
(example 2x2 & 3" On center-Spindle/Balusters Spacing: Spaced to prevent a 4" sphere from passing through spindles)



STAIRS (If deck height is over 8 1/4" there must be stairs or egress on deck level)

24. _____ YES _____ NO Tread will be a minimum depth of 9" per NYS
25. _____ YES _____ NO Riser will be a maximum height of 8 1/4" Maximum per NYS
26. _____ YES _____ NO Variance for Tread or Riser will not exceed 3/8"
27. _____ Handrail type (TYPE I Circular, TYPE I Non-Circular or TYPE II. Required if more than 4 Risers. See reverse side for requirements)

POOL DECK (if applicable & details must be included in deck drawing)

28. _____ YES _____ NO Gate will open outward away from the pool and must swing over a **landing area** or **over the ground**?
29. _____ YES _____ NO Gate will be on **self-closing** and **self-latching**?
30. _____ YES _____ NO Gate will be a minimum of 48" high.

(If the self-latching device is located less than 54" from the bottom of the Gate then the latch shall be located on the pool side of the Gate at least 3" below the top. The Gate and barrier shall have no openings greater than 0.5" within 18" of the latch when located on the pool side.)